



500 KW / 625 KVA POWERED by



MODEL		TP-C500-T1-60	
<p>Triton Power is a world leader in the design, manufacture of stationary, mobile and rental generator sets and Power Modules from 10 to 2000 kW. Through our commitment to quality we manufacture with only the highest quality components from companies like Cummins, John Deere, Perkins, Marathon, and Deep Sea. All of this plus our worldwide warranty, customer service professionals, is why Triton is the THE POWER OF QUALITY</p>			
Available Voltage 3 Phase 120/208, 110/220, 120/240, 277/480 Power Factor 0.8	Standby	kVA	625
		kW	500
	Prime	kVA	565
		kW	450

Standby : Continuous running at variable load for duration of an emergency. No overload is permitted on these ratings. In accordance with ISO 3046 .

Prime : Continuous running at variable load for unlimited periods with 10% overload available for 1 hour in any 12 hour period. In accordance with ISO 8528, ISO 3046.

- High quality, reliable and complete power unit
- Compact design
- Easy start and maintenance
- Every generator set is subject to a comprehensive test program which includes full load testing and checking and providing of all control and safety shut down functions testing
- Full engineered with a wide range of options and accessories:
 - Sound Attenuated Enclosure
 - Trailer with fuel tank
 - UL Listed Fuel Tank
 - Permanent Magnet Generator
 - Electronic Governor



Manufacturer reserves the right to make changes in model, technical specifications, color, equipment and accessories without prior notice.
All photos are representative and may not reflect exact model



ENGINE INFORMATION

ENGINE MAKE		CUMMINS
Model		QSX15G9
Engine Speed	RPM	1800
Engine Power Output at rated rpm	kWm	563
	HP	755
Cooling		Air-to-Air Charge Cooled
Aspiration		Turbocharged
Total Displacement	Liter	15.0
No. of Cylinders and Build		6 cylinder, In-line
Bore and Stroke	mm x mm	137 x 169
Compression Ratio		17.0:1
Governor		Mechanical
Fuel Consumption (L/hr)	Full Load	117.8
	75% Load	90.5
	50% Load	65.3
Fuel Tank Capacity (Non-UL)	Liter	1000
Oil Capacity	Liter	91
Coolant Capacity	Liter	42
Radiator Cooling Air	m³/sec	11.8

<p>Diesel powered generator sets remain the number-one choice for standby and emergency power systems, worldwide. Able to start and assume load in less than 10 seconds, and rated load in a single step, Cummins diesel generator sets are the epitome of rugged dependability and reliable mechanical and electrical performance. Diesel generators are also well suited to utility peaking plants, Distributed Generation (DG) facilities, peak shaving (or peak lopping), and power management at large commercial or industrial sites.</p>	<p>As a mature technology, Cummins clean and modern diesel-powered generators offer these key benefits:</p> <ul style="list-style-type: none"> • Rapid product availability • Proven reliability and low life-cycle costs • High efficiency and operational flexibility • High quality electrical performance • Well-established service and fuel supply infrastructure • Optional factory-integrated exhaust after treatments reduce emissions for high-hour use in environmentally sensitive locations.
---	---

Manufacturer reserves the right to make changes in model, technical specifications, color, equipment and accessories without prior notice.
 All photos are representative and may not reflect exact model



CONTROLLER INFORMATION DEEP SEA MODEL 7310

The DSE7310 is an Auto Mains (Utility) Failure Control Module suitable for a wide variety of single, diesel or gas, gen-set applications. A sophisticated module monitoring an extensive number of engine parameters, the DSE73xx will annunciate warnings, shutdown and engine status information on the back-lit LCD screen, illuminated LED, remote PC, audible alarm and via SMS text alerts. The module includes RS232, RS485 & Ethernet ports as well as dedicated terminals for system expansion.

MAIN FEATURES:



- | | |
|---|---|
| <ul style="list-style-type: none"> • Configurable inputs (11) • Configurable outputs (8) • Voltage measurement • Mains (utility) failure detection • Dedicated load test button • kW overload alarms • Comprehensive electrical protection • RS232, RS485 & Ethernet remote communications • Modbus RTU/TCP • PLC functionality • Multi event exercise timer • Back-lit LCD 4-line text display • Multiple display languages • Automatic start/Manual start • Audible alarm • Fixed and flexible LED indicators • Event log (250) • Engine protection • Fault condition notification to a designated PC • Font panel mounting • Protected front panel programming • Configurable alarms and timers • Configurable start and stop timers • Five key menu navigation • Front panel editing with PIN protection • 3 configurable maintenance alarms • CAN and Magnetic Pick-up/Alt. sensing | <ul style="list-style-type: none"> • Fuel usage monitor and low fuel alarms • Charge alternator failure alarm • Manual speed control (on compatible CAN engines) • Manual fuel pump control • “Protections disabled” feature • Reverse power protection • Power monitoring (kW h, kV Ar, kV A h, kV Ar h) • Load switching (load shedding and dummy load outputs) • Automatic load transfer • Unbalanced load protection • Independent Earth Fault trip • Fully configurable via DSE Configuration Suite PC software • Configurable display languages • Remote SCADA monitoring via DSE Configuration Suite PC software • Advanced SMS messaging (additional external modem required) • Start & stop capability via SMS messaging • Additional display screens to help with modem diagnostics • DSENet® expansion compatible • Integral PLC editor |
|---|---|

BENEFITS

- | | |
|---|---|
| <ul style="list-style-type: none"> • RS232, RS485 & Ethernet can be used at the same time • DSENet® connection for system expansion • PLC functionality • Five step dummy load support • Five step load shedding support | <ul style="list-style-type: none"> • Worldwide language support • Direct USB connection to PC • Ethernet monitoring • USB host • Data logging & trending |
|---|---|

OPERATION

The module is operated using the front STOP/RESET, MANUAL, AUTO, TEST and START pushbuttons. An additional pushbutton next to the LCD display is used to scroll through the modules metering displays.



ALTERNATOR INFORMATION

Manufacturer	Stamford Newage
Design	Brushless single bearing, revolving field
Stator	2/3 pitch
Rotor	Single bearing, flexible disc
Insulation System	Class H
Standard Temperature Rise	125 -163°C Continuous
Exciter Type	Self Excited
Phase Rotation	A (U), B (V), C (W)
Alternator Cooling	Direct drive centrifugal blower fan
AC Waveform Total Harmonic Distortion	No load < 1.5%. Non distorting balanced linear load < 5%
Telephone Influence Factor (TIF)	<50 per NEMA MG1-22.43
Telephone Harmonic Factor (THF)	<2%

STANDARD ITEMS


- Mainline Circuit Breaker
- Generator Set mounted on Heavy Duty Steel Base Frame
- Anti-Vibration Pads between Engine/Alternator and Frame
- 8 to 10 Hour Base Fuel Tank (up to 600 kW)
- Forklift Pockets within Base Frame (up to 400 kW)
- Battery Charging Alternator

OPTIONAL ITEMS


ENGINE OPTIONS	<ul style="list-style-type: none"> • Engine Block Heater • Racor Fuel Water Separator • Oil Heater
ALTERNATOR OPTIONS	<ul style="list-style-type: none"> • Permanent Magnet Generator • Anti-Condensation Heater • Oversized Alternator (Motor Starting)
OTHER OPTIONS	<ul style="list-style-type: none"> • Sound Attenuated Enclosure with Critical Silencer (70 db at 7 meters) • Trailer (with or without fuel tank) • UL-142 Base Mounted Fuel Tank • Residential or Critical Grade Silencer



WEIGHT AND DIMENSIONS

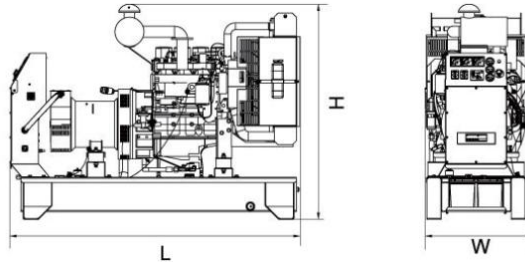

SKID MOUNTED GENERATOR		
DIMENSIONS (LxWxH)	mm	3340 x 1920 x 1340
DRY WEIGHT	kg	5016

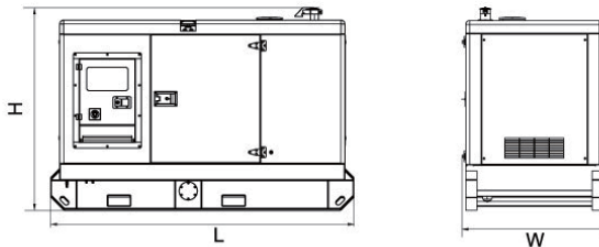

SOUND ATTENUATED GENERATOR		
DIMENSIONS (LxWxH)	mm	Inquire
DRY WEIGHT	kg	Inquire

FEATURES AND BENEFITS OF ENCLOSURE:

- | | |
|--|---|
| <ul style="list-style-type: none"> All enclosure parts are modular No welding to reduce corrosion Doors on both sides for easy maintenance All metal parts are powder coated | <ul style="list-style-type: none"> Critical Exhaust Silencer Included Thermally insulated exhaust system Emergency stop located on exterior Easy Lifting and Moving |
|--|---|



TRITON POWER CORP
 8511 NW 61 STREET MIAMI, FL USA
 305-592-6300 Fax: 305-592-5900 email: info@tritonpower.com
www.gopower.com

Triton Power is a subsidiary of Americas Generators, Inc.